

Part Number: AE-SC48001H

10/100/1000 BASE DUAL PORT TRANSFORMER

Page: 1/2

- Compliant with IEEE 802.3 standard.
- RoHS compliant.
- Operating temperature range:-40°C to +85°C.
- Storage temperature range:-40°C to +125°C.




Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL(μH Min) @100KHz/0.1V with 8.0mA DC	Insertion Loss (dB Max) 1-100MHz	HI-POT (Vrms)	DCMR (dB Min)		
	TX	RX				30MHz	60MHz	100MHz
AE-SC48001H	1CT:1CT	1CT:1CT	350	-1.1	1500	-30	-28	-25


Continue

Part Number	Return Loss (dB Min)					Cross Talk (dB Min)		
	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz
AE-SC48001H	-18	-14.4	-13.1	-12	-10	-40	-35	-30

Mechanicals:

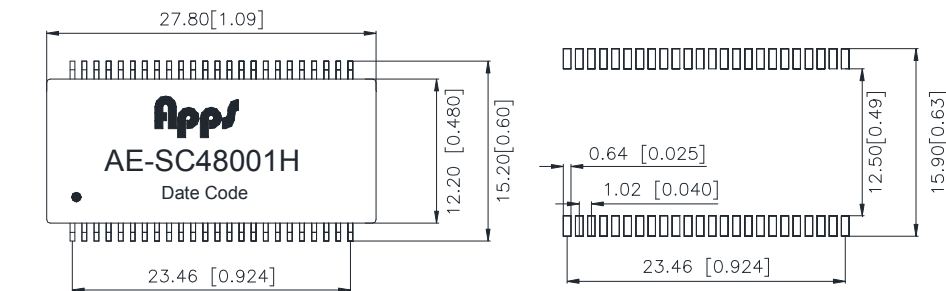

SUGGESTED PCB LAYOUT

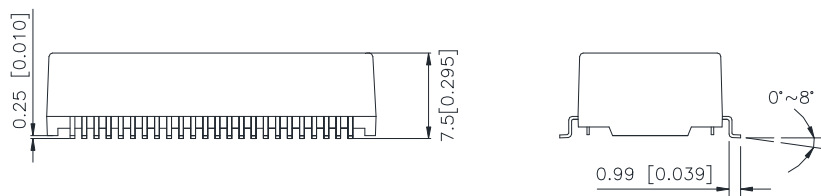

Dimension: mm[Inch]±0.25[0.010]

Address: Room 1720, Block A, Xinian Centre, Shennan Road, Futian District, Shenzhen, Guangdong, P.R. China

Tel : +86 (755) 86538552 Fax : +86 (755) 26653184 Post Code : 518057


Http: www.appselectronics.com E-mail: sales@appselectronics.com

Part Number: AE-SC48001H

10/100/1000 BASE DUAL PORT TRANSFORMER

Page: 2/2

Schematics:

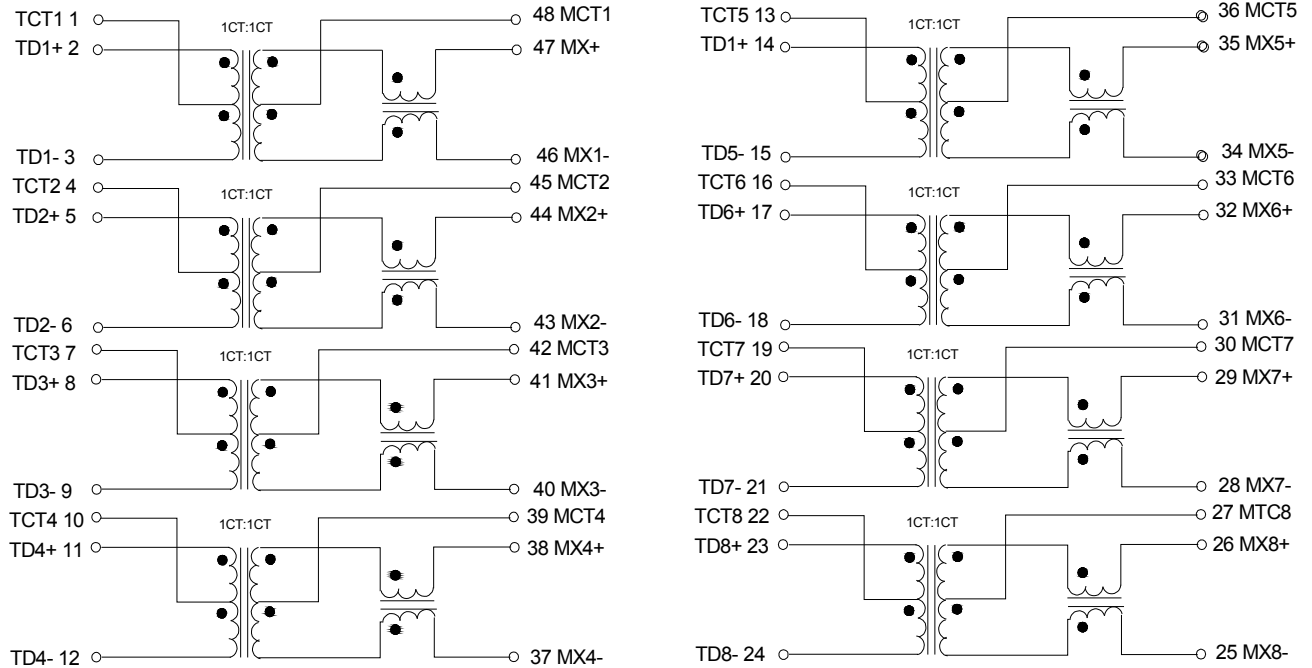

Package:

